



**HAGURIM SHEL EYAL**  
medical equipment



## **VETERINARY CLINIC**

We supply one stop shop solutions for pet clinic

# COMPANY INTRODUCCION

HAGURIM SHEL EYAL GROUP LTD specialize in Veterinary Clinic Solutions such as Pet cages, Pet operating tables, Pet grooming tables, Examination tables, Mobile trolleys, Pet care rooms (drying devices), Pet incubators, Veterinary X-ray systems.

The factory was established in 2017, and has workshops that occupy a total of 1000 square meters.

Our pet cages achieved fully automatic production lines, with a production of over 10,000 units.


HAGURIM SHEL EYAL GROUP LTD is committed to production from all of its heart. HAGURIM SHEL EYAL GROUP LTD supply the best products and services for every single customer.

Pet Cage	Pet Operating Table	Pet Grooming Table
SS Exam Table	Pet Bath Sink	Medical Trolley
Veterinary Digital X-Ray System	Pet Bath Sink	Medical Trolley





# SUCCESSFUL CASES

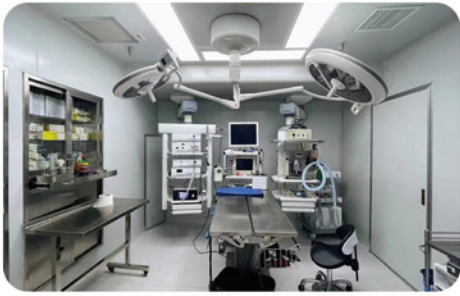

## PC-1

### Combined stainless steel fostering cage (inpatient) cage

Material: 304 stainless steel, thickness: 1.2mm  
optional accessory: oxygen gate

The lower level cage is designed for pumping plate, and the pumping plate can be drawn out into a large cage, bottom moving brake wheel, mute, wear-resistant, easy to shift and fixed. can be customized according to demand.

The out size: 1220\*700\*1570mm, the upper cage: 610\*610\*700mm; the under cage: 610\*820\*700mm; dirt receiving basin: 690\*540\*45mm; pedal mesh: 690\*545\*10mm; the upper cage door: 530\*480\*8mm; the under cage door: 530\*690\*8mm; Packing size: 1300\*830\*1760-1.9m; GW: 187kg



## PC-2

### Inpatient oxygen chamber cage power supply

Material: 304 stainless steel, thickness: 1.2mm

Out size: 1220\*700\*1570mm; upper cage: 550\*610\*700mm; under cage: 610\*820\*700mm; dirt receiving basin: 687\*540\*45mm; Pedal mesh: 687\*545\*10mm; upper cage door: 470\*480\*8mm; under cage door: 530\*690\*8mm

Packing size: 1300\*830\*1760=1.9m<sup>3</sup>, GW: 220kg, can be customized according to demand.



## PC-3

### Inpatient oxygen chamber cage power supply

Material: 304 stainless steel, thickness: 1.2mm

Out size: 1220\*700\*1570mm; upper cage: 550\*610\*700mm; under cage: 610\*820\*700mm; dirt receiving basin: 687\*540\*45mm; Pedal mesh: 470\*545\*10mm; upper cage door: 470\*480\*8mm; under cage door: 530\*690\*8mm

Equipped with oxygen cabin door, 16 bit power interface, oxygen hole, dry and wet temperature display, leakage protection.

Packing size: 1300\*830\*1760=1.9m<sup>3</sup> GW: 222kg



## PC-4

### Vet cages for cats

Material: 304 stainless steel, thickness: 1.2mm

Out size: 1000\*650\*1760mm; upper cage: 1000\*810\*650mm; under cage: 1000\*810\*650mm; cat springboard: 580\*250\*10mm; 4 left cage door: 670\*750\*8mm; right cage door: 270\*750\*8mm

Packing size: 1070\*780\*1920=1.6m<sup>3</sup> GW: 180kg



## PC-5

### Cat cage

Material: 304 stainless steel, thickness: 1.2mm

Size: 1220\*700\*1570mm

Packing size: 1300\*830\*1760=1.9m<sup>3</sup> GW: 187kg



## PC-6

### Stainless steel in-patient dry cage (without net and plate)

304 stainless steel material, thickness 1.2mm

Upper cage: long, 610 high 610 deep 700  
lower cage: 610 long, 820 high, 700 deep  
dimensions: length 1220 depth 700 height 1575

Package size: 1300\*830\*1760=1.9m<sup>3</sup>, GW: 170kg







## PC-7

### Stainless steel pet display (foster, inpatient)

Material:304 stainless steel, thickness: 1.2mm

LWH: 1220\*700\*2180mm

Random combination, can be customized according to demand.



## PC-8

### Five stainless steel cage for foster care (hospitalization)

The overall 304 stainless steel material, anti-corrosion, anti-acid not rust cage material thickness of 10mm and diameter of 4mm steel wire composition, pollution plate material thickness of 0.8mm

Upper cage: 500 long 610 high 700 deep ,lower cage: 750 long, 820 high, 700 deep,dimensions: length 1220 deptn 700 height 1575

Package size :1580\*830\*1760=2.3m<sup>3</sup>, Gw 225kg



## PC-9

### Vet cage

Material:304 stainless steel, Thickness:1.2mm

Out size: 2440\*700\*2180mm: upper cage: 610\*610\*700mm:uder cage: 610\*820\*700mm: dirt receiving basin: 690\*540\*45mm:pedal mesh: 690\*545\*10mm: upper cage door: 530\*480\*8mm: uder cage door: 530\*690\*8mm, size: 1295\*830\*1765-1.9\*2-3.8m\*- 1295\*830\*1380-1.48m3GW211\* 2=422kg 186kg

Cages are equipped with LED lamp, energy saving and bright. customizable on demand



## PC-10

### Heating lamp power oxygen chamber cage

Material: 304 stainless steel, thickness: 1.2mm

Overall dimensions: 1220\*700\*815;upper cage: 1610\*610\*700;lower cage: 610\*820\*700;dirt plate: 687\*540\*45;foot mesh: 687\*545\*10; upper cage door: 470\*, 480\*8; lower cage door: 530\*690\*8; power supply equipment layer:1220\*600\*120

Packing size: 1300\*835\*1990=2.16m<sup>3</sup> GW: 228kg




## PC-11

### Four high-end cat cages

304 stainless steel material, thickness 1.2mm

Each group has two floors, each floor has an independent leisure area, food area and health area

Dimensions: length 1500 depth 650 height 1765



## PC-12

### Fully functional animal medical monitoring module

Inner wall wrapped 3D equalizing temperature system. central integrated high sensitivity oxygen sensor precise oxygen supply system, adaptive adjustment of highlighting inspection light and 1. warm light, High concentration of medical grade negative ions. 415nm Blue ray medical system. Co2 concentration detection ventilation adaptive, unattended power off ventilation system. Ultraviolet highly effective sterilization system,Built-in high efficiency micro particles double pump drivenair compression medical atomization equipment

Dimensions: long 1400 deep 860 high 1900, Installation reservation size: l 1530 D 950 H 1980

## PC-13

### Stainless steel pet oxygen cage

The box is made of 304 stainless steel. the back is equipped with an exhaust outlet. the door is made of transparent plexiglass and equipped with an adjustable ventilation hole. It is equipped with a dry and wet thermometer and an oxygen connection hole. the door is automatically locked, it is safe and convenient with the stainless steel grid and movable plate.

Size: 610\*700\*610-1410mm; pack size: 850\*800\*890-0.6m<sup>3</sup> / 1485\*880\*925=1.2m<sup>3</sup>, GW:L 143KG



## PC-14

### Stainless steel pet oxygen cage

The box is made of 304 stainless steel. the back is equipped with an exhaust outlet. the door is made of transparent plexiglass and equipped with an adjustable ventilation hole. It is equipped with a dry and wet thermometer and an oxygen connection hole. the door is automatically locked, it is safe and convenient with the stainless steel grid and movable plate.

Size: 610\*700\*610-1410mm



## PC-15

### Combined stainless steel fostering cage (inpatient) cage

Made of high-strength solid 304 stainless round steel, the upper pressure mesh can be moved up and down flexibly, which can clamp large and fierce dogs effectively, and it is very convenient for injection inspection. there is no need to worry about being bitten by a dog. there are doors and automatic locks on both sides of the cage to secure the safety.

Size: Small: 700\*360\*500mm; Large: 970\*420\*680mm; extra large: 1200\*460\*780mm; packing size: extra large 1350\*640\*1010=87m<sup>3</sup>, gw96kg M: 1130\*600\*930=0.63m<sup>3</sup> gw80KG



## PC-16

### Stainless steel square tube pet cage

The square tube cage can be designed assembly, automatic lock with cage door, novel design and easy to use! Made of 304 stainless steel, the thickness of the square tube of the cage frame is 1.2mm, and the thickness of the string tube is 1.0mm. It is equipped with a stainless steel pedal and a stainless steel plate. It is very convenient to move and fix with the active brake wheels.

Size: 1200\*800\*1050mm, customize as required




## PC-19

### Stainless steel pet hospital cage

Width 2440mm, the third layer of 5 grids each about 488mm width

Total depth of pet carrier 700mm

Total height 2145mm, wheel height: 145mm  
the first layer of four grids each height: 820mm  
the second layer of four grids each height: 610mm  
the third layer of five grids each height: 570mm



## PC-17

### Treatment Table with Cage

The top of the cage is covered with a 304 stainless steel cover, around is made of stainless steel bars and is not easily deformed. The desktop is about 4CM wider than the cage, which is convenient to use as a treatment table. It can bear weight and can be produced on demand!

Size: 800\*500\*800mm



## PC-18

### Stainless steel folding cage

The bottom of the cage is equipped with 2 movable tray, easy to clean, anti-skid universal wheel with brake

Size: 95\*65\*70cm, size/material can be customized





## PC-23

**304 stainless steel cage**

1200\*600\*800MM 304 stainless steel




## POT-25

**Dental Large hinge operating bed Machine**

304 Thickened countertops, Change the traditional thrust mode, Equipped with new electro-hydraulic push rods

Table temperature is adjusted as required

Room temperature - about 40°, Note: It can not work after 20 minutes of cooling and preheating)

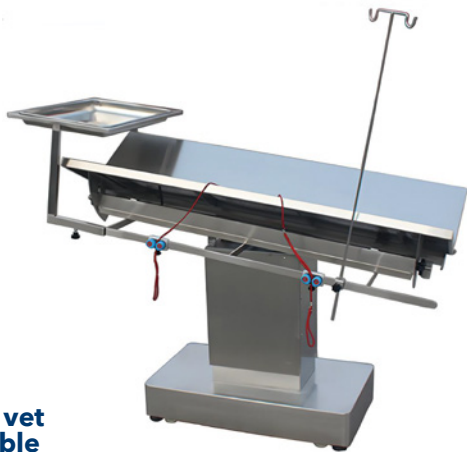

## POT-1

**DWV-II type vet operation table**

The animal operating table consists of three parts: table top, pin, and base. It is equipped with a surgical instrument tray and an infusion stand.; The middle of table board has a sink; The right-and-left tilt is 5°/15°; The fore-and-aft tilt is 45°, The material is 304 Stainless steel Temperature adjustment range 0-60 degrees, automatic thermostat function, freely adjust the required temperature; Built-in high temperature protector, safe and reliable

Size: 1400\*650\*760-1060mm, packing size: 1475\*735\*955=1.04m, GW154kg



## POT-2

**Stainless steel constant temperature bi-directional tilt lift operating table**

Stainless steel thermostatic bi-directional tilting lifting table temperature between 0-60 degrees. automatic thermostat function. The temperature can be freely adjusted, built-in high temperature protection, safe and reliable. The countertop is made of high quality 304 stainless steel and is equipped with stainless steel mesh. Binding artifacts on both sides. Simple and solid, convenient and practical, touch lift switch, easy, to operate, with binding artifacts on both sides, simple and secure, The operating table is made of high-quality 304 stainless steel and the entire equipment never rusts.

Size: 1500\*600\*760-1050mm, packing size: 1600\*700\*940=1.05m<sup>3</sup>



## POT-3

**Electric animal operating table**

The lifting of the working table adopts electric system, with a sink in the middle; The left and right side of the working table can be tilted 0-15° respectively, using mechanical manual operation; The front and back of the worktable can be tilted 0-45 degrees, using manual operation; The whole machine adopts stainless steel, high temperature resistance, anti-corrosion, anti-rust; Working table temperature adjustment range: 0°C-50°C, power on before work, set the required temperature, preheating 20 minutes can work;

Size: 1400\*650\*760-960mm

Table with constant temperature system, with electric lifting system (switch pedal, one key control up, one key control down), Countertops can be tilted left and right, or folded back and forth

Table and base materials are optional



## POT-4

**Hydraulic animal operating table**

Hydraulic system is adopted to lift the working table, with a sink in the middle: The left and right side of the working table can be tilted 0-15° respectively, using mechanical manual operation; The front and back of the work table can be tilted 0-45 degrees, using manual operation; The base adopts A3 steel plate computer baking paint to prepare pulley, Standard grid

Standard grid; The table can be tilted left and right, and can be folded before and after

Size: 1400\*650\*820-930mm, Function optional





## POT-5

### C arm operating table

The main body of the operating table is made of 304 stainless steel and the bed plate is made of phenolic laminated paperboard, which has the characteristics of uniform density and good X-ray transmittance.

Size: 1500\*600\*760-1050mm

The operating table can be tilted 45° in front and back respectively. It is electrically operated and weighs 40kg on one side.

## POT-6

### Electric lifting console

High precision temperature control, materials 304 stainless steel

Size: 140\*60\*(58-116)cm

Optional materials / size, Gross / Net weight: 100kg



## POT-7

### Multi functions pet treatment table

The material is 304 Stainless steel Use a diameter of 8mm for the keel, and a crossbeam with a 4mm diameter spot weld.

Adopt full circular bead without blind angle, easily clean stainless steel water faucet with two kinds of water to easily use ,the table board has the active mesh, 3 drawers and 1 cabinet

Size: 1400\*600\*880mm, Packing size 1475\*670\*1050=1.04m<sup>3</sup>, GW 125kg

## POT-8

### Wooden frame wet disposal table

Body part wood, Table surface: 304 stainless steel, Grid is made of 8mm diameter main frame, and 4mm diameter horizontal rod, cross spot welding.

The surface of the disposal platform is made of all round fillets without any blind angle. The cleaning is convenient. The water leakage is made of stainless steel filter wool and water will not be blocked. Equipped with stainless steel retractable water tap. 2 water outlet modes are easy to use. it can be washed at far and close distance, and the drawer sliding rails adopts stainless steel thick guide rail. With a cabinet, and three drawers.

Size: 1400\*600\*880mm, Packing size 1475\*670\*1050=1.04m<sup>3</sup>



## POT-9

### Wooden frame dry type treatment table

Body part: wood, Table surface: marble

The surface of the disposal platform is made of marble, smooth and clean and the cleaning of the drawer is convenient. The drawer sliding rail is made of stainless steel thick guide rail. With a cabinet, three drawers

Size: 1400\*600\*880mm, packing size 1475\*670\*1050=1.04m<sup>3</sup>, GW: 134kg

## POT-10

### Stainless steel vet ot table

The operating table is made of high quality 304 stainless steel. It is equipped with stainless steel movable mesh. it can have flat screen and circular arc mesh. It adopts a slanting lift support. It is stable and stable. It is equipped with a touch type lifting switch. The operation is simple and the whole equipment never rusts.

Size: 1300\*600\*450-1000mm, package size: 1580\*690\*550=0.6m<sup>3</sup>, GW: 89kg







## POT-11

### Stainless steel pet operating table (thermostat)

All stainless steel V constant temperature operating table temperature between 0-60 degrees. automatic constant temperature function, can adjust the required temperature at will, equipped with leakage protector, high temperature protector, the use of safety, high quality 304 stainless steel table. with stainless steel movable mesh, can have flat net and circular arc screen selection use inclined support lifting support, liter Stable, lock firmly, with touch type lifting switch, easy to operate, the whole equipment will never rust

Size:1300\*600\*450-1000mm, packing size: 1580\*690\*550=0.6m<sup>3</sup>, GW: 90kg



## POT-12

### Stainless steel single side tilt table

Made of high quality 304 stainless steel, equipped with stainless steel movable mesh, can have flat net and circular arc screen selection, use oblique bracing support, angle adjustment, smooth lifting, lock firm, with touch-lift switch, easy operation, and the whole equipment never rust.

Size: 1300\*600\*450-1000mm, packing size:1580\*690\*550=0.6m<sup>3</sup>, GW: 90kg



## POT-13

### Electric pet grooming table

Electric controlled grooming table. 25cm lowest height. water proof fiber table top. foot pedal controller, Hair dryer hooks, China most famous brand "jiechang" Motor

Size: 1250\*650\*250\*950mm



## POT-14

### Stainless steel treatment table with acrylic countertops

The main acrylic lift table is made of 304 wire drawing board, detachable acrylic table, electric lift, smooth lifting, universal brake wheel (optional fixed fine tuning feet)

Electric lift, durable, removable acrylic countertops

Size:120\*600\*500-1000mm, packing size 1375\*690\*565=0.5m<sup>3</sup>, qw: 78kg



## POT-15

### Surgery table

This table is specially designed for large or heavy animals. Like horses, cows. the whole table is made of quality 304 stainless steel, loading capacity: 400KG table top tilting (front & back) is adjustable from 0-45° by manual control. the height is adjustable by electric control, with drainage in the middle of the table top. with castor wheels.

Size: 1750\*860\*340/890mm



## POT-16

### Dissecting table

304 stainless steel

Size: 690\*300\*100mm, small 1100\*550\*800mm, sizes are customizable upon request.



## POT-17

### Electric Pet Operating Table

PLVOT-002 is electric pet operating table, The movements of up and down, trendenbourg, lateral tilt are electric controlled tabletop "V" shape is manual controlled. The table material is all stainless steel 304.

Table top consists of 2 plates

Both the table plates can tilt 45°, manual controlled

Length 1400mm, Width 650mm, Height 760-1060mm, Table Top Tilt 15°, Plate Tilt 45°, Load Capacity 250kg



## POT-18

### Pet Treatment Table

The pet treatment table top adopts a concave rounded design, which is more convenient for cleaning with a water outlet, which can be used for pet cleaning, built-in towel rack and trash can. The drawer slides in the cabinet are made of stainless steel thick rails.

Size: 1400\*650\*850mm



## POT-19

### POT stainless steel flat panel treatment table

304 stainless steel material, electric lift, full rounded corners, smooth

Size: 1300\*600\*450-1000mm, packing size 1575\*690\*555=0.6m<sup>3</sup> gw: 80kg



## POT-20

### Stainless steel pet weighing treatment table

The materials: 304 stainless steel, weighing, diagnosis, treatment, and disposal of multi functional tables.

Size: 1000\*550\*800mm, packing size: 1070\*620\*960=0.64m<sup>3</sup>



## POT-21

### Stainless steel constant-temperature treatment table

304 stainless steel, Worktable temperature adjustment range between 0-60 degrees, constant temperature, The desired temperature can be adjusted as desired, Built-in high temperature protector, Safe and reliable, the table is flat, with a sink and sewage plate, easy to clean, optional infusion pump.

Size: 920\*520\*840mm, Packing size: 1080\*595\*980=0.63m<sup>3</sup>, GW: 60kg



## POT-22

### Stainless steel simple infusion station

Made of 304 stainless steel, the thickness of the table is 1.2mm, the thickness of the lower plate is 1.0mm, the column is 30\*30 square tube, thickness 1.2mm, the table is equipped with railings, brake wheel or adjusting foot is optional.

Big Size: 1100\*600\*800mm, Small Size: 900\*500\*800mm.  
Packing size: 1180\*670\*990=0.78m<sup>3</sup>, GW: 64kg





## POT-23

### Stainless steel acrylic baffle infusion table

The whole 304 stainless steel material is corrosion resistant, acid proof and stainless steel. The acrylic baffle is more high-grade and has good isolation and mute effect with high strength acrylic baffle on both sides. It can be arranged in a row

Large: 1100\*550\*800mm, Small: 900\*500\*800mm



## POT-24

### Stainless steel pet weighing treatment table

The whole material is 304 stainless steel, anti-corrosion, anti-acid and no rust, mobile pulley movable table with moving brake wheel

The table is flat acrylic plate, the column is 304 stainless steel, no rust, silent moving brake wheel! ,Removable table, push lift

Size: 1360\*600mm \*850mm




## TT-1

### stainless steel new design column diagnosis and treatment table

304 stainless steel, the table surface is smooth, all around is polished decoration, the bottom is equipped with binding brackets, heavier base is with fine-tuning feet.

Large size: 1100\*600\*800mm, small size: 900\*500\*800mm,

970\*570\*960=0.53m<sup>3</sup>. Small gross weight: 50kg

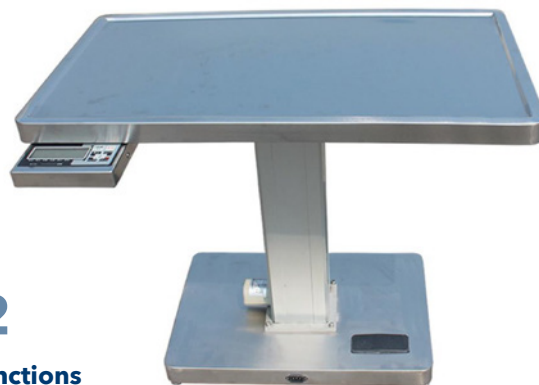

## TT-2

### Multi-functions electric lifting treatment table with scale

The surface is with concaved round corner, easy to clean: the height adjustment is controlled by electronic pedal, and it is easy to use: equipped with high precision electronic scale core it can be used in pet diagnosis and treatment, treatment of trauma, reception, weighing and so on.

Size: 900\*500\*750-1050mm, Packing size: 975\*575\*900=0.5m<sup>3</sup>. GW: 77kg




## TT-3

### Multi-functions electric lifting treatment table

The surface is composed of square tube bracket, detachable pallet and mesh, convenient to be cleaned. the height adjustment is controlled by electric pedal, and it is easy to use, water leaking uses stainless steel filter, will not be blocked. it can be used to wash pet teeth, deal with trauma, and receive medical treatment.

Size: 1200\*600\*750-1050mm, Packing size: 1285\*685\*900. 86KG

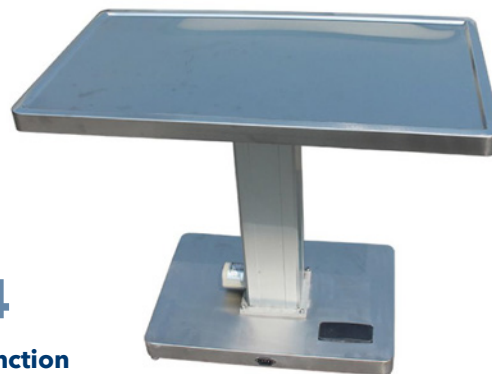

## TT-4

### Multi-function electric lift diagnosis and treatment table

The surface is with concaved round corner, easy to clean: the height adjustment is controlled by electric pedal, and it is easy to use; it can be used in pet diagnosis and treatment, treatment of trauma, reception and so on.

Size: 900\*500\*750-1050mm



## TT-5

### Column weighing diagnosis and treatment table

The surface is with concaved round corner, easy to clean, equipped with high precision electronic scale core, it can be used in pet diagnosis and treatment, treatment of trauma, reception, weighing and so on.

Size: 900\*500\*800mm



## TT-6

### Stainless steel belt drawer diagnosis and treatment table

The Materials: 304 stainless steel, The bottom moving wheel adopts high strength poly ammonia cool universal brake wheel. Equipped with universal brake wheels, and drawer, and bottom plane can put things.

Large size: 1100\*600\*800mm, Small size: 900\*500\*800mm

Packing Large size: 1170\*690\*950=0.77m<sup>3</sup>, gw 65kg  
Small: 975\*610\*960=0.57m<sup>3</sup>, gw 53kg







## BET-1

### Z type hydraulic beauty table

The boom is 201 stainless steel, adjustable height, one boom. The length is 123CM and the wall thickness is 1.0mm. The boom is equipped with braided rope to facilitate the fixation of pets. Its length is 50cm, and the bottom frame is composed of iron square tubes with a wall thickness of 1.0mm.

Size: 108\*60\*(57-92)cm, packing size: 113\*63\*58, GW 39.5kg / NW 31.5kg



## BET-3

### Pet grooming table

The boom is 201 stainless steel, H type. Adjustable height, uniform wall thickness of 1.0mm. The boom is equipped with 2 braided ropes, which are 50cm in length, for the convenience of securing pets. Legs are 201 stainless steel 32 round tube. Wall thickness is 1.0 MM

L Size: 117\*60\*76cm, packing size: 119\*621\*2cm, GW 19.5kg / NW 18kg

M Size: 90\*60\*76cm, packing size: 192\*62\*12cm, GW 17kg / NW 15.5kg



## BET-4

### Hydraulic lifting beauty table

Non-slip rubber veneer, aluminum alloy strip edge

Desktop size: 80\*50\*(75-85)cm, size: L90\*W60\*H72-86cm (lifting height is 14cm)  
packing size: Table top + chassis: 92\*60\*13cm, Oil pump + trapezoidal frame: 42\*31\*29cm, NW 28KG / GW 30KG

Optional: colors



## BET-5

### Hydraulic lifting beauty table

Non-slip rubber veneer, aluminum alloy strip edge

Desktop size: 75cm, height 75-89 cm (lifting height is 14cm)  
packing size: Table top + chassis: 92\*60\*13cm,  
Oil pump+ trapezoidal frame: 42\*31\*29cm, NW 27KG / GW 29KG

Optional: colors



## BET-6

### Pet grooming table

The suspender is 201 stainless steel with adjustable height and consists of two sections. The wall thickness of 75cm\*19mm and 58cm\*22mm respectively is 1.0mm. The suspender is equipped with braided rope for the convenience of fixing pets, its length is 50cm, and the legs are 32 round tubes of 201 stainless steel. Wall thickness of 1.0 MM

L Size: 120\*60\*65cm, packing size: 122\*62\*12cm, GW 19kg / NW 17.5kg

M Size: 90\*60\*76cm, packing size: 92\*62\*12cm, GW 16kg / NW 14.5kg

S Size: 81\*48\*80cm, packing size: 85\*51\*12cm, GW 13kg / NW 12kg



## BET-7

### Electric pet operating table

LED light, table top tempered glass, Stainless steel base and bracket, lifting foot pedal

Optional mesa / color

Size: 120\*60\*30-120cm, packing size: 127\*64\*38cm, l.2m³, GW 77KG



## BET-8

### Pet grooming table

The boom is 201 stainless steel, the length is 120CM and the wall thickness is 1.0mm. The boom is equipped with braided rope, which is 50cm in length to secure the pet. The legs are 25 iron square tubes. Wall thickness of 1.0 MM

L Size: 91\*61\*76cm, packing size: 94\*64\*11cm, GW 17kg / NW 15.5kg  
S Size: 78\*48\*76cm, packing size: 80\*50\*11cm, GW15Kg / NW 14kg

Optional material / colors



## BET-10

### Pet grooming table on wheels

Dog lead on wheels, The suspender rod is 201 stainless steel with adjustable height and uniform wall thickness of 1.0mm. The boom is equipped with a braided rope, which is 50cm in length, for the convenience of fixing pets.

Size: 90\*60\*76cm, packing size: 92\*62\*12cm, GW 17KG / NW 15.5KG



## BET-12

### Pneumatic lifting beauty table

Product size: 60\*(70-104) cm, Package size: 69cm\*20cm\*63cm  
Gross / net weight: 16.5kg / 18.5kg

The desktop is 1.8cm density board, equipped with nylon jig and folding derrick, the vertical rod is 74cm long and the transverse rod is 36cm long; The boom is 201 stainless steel

Customizable stainless steel base; Optional: square desktop, gantry boom.



## BET-9

### Hydraulic beauty table

The suspender rod is 201 stainless steel with adjustable height and uniform wall thickness of 1.0mm. The boom is equipped with a braided rope, which is 50cm in length, for the convenience of fixing pets.

The desktop is a 1.8cm density board. Pagoda - shaped anti - slip anti - static adhesive black. Aluminum alloy fixture two suspender. Stroke is 72-84 cm

Size: 90\*60\*(72-84)cm, packing size: A; 92\*62\*11cm B; 39\*39\*45cm, GW 31KG / NW 29KG



## BET-11

### Stainless steel pet bath without door

108\*60\*(20-95) cm or 120\*60\*(20-95) cm.

Two sizes, the desktop is 1.8CM density board anti-slip anti-static rubber leather stainless steel boom, the support is iron spray plastic. The meniscus boom



## BET-13

### Pneumatic lifting beauty table

Product size: 60\*(70-104) cm, Package size: 69cm\*20cm\*63cm  
Gross / net weight: 16.5kg / 18.5kg

The desktop is 1.8cm density board, equipped with nylon jig and folding derrick, the vertical rod is 74cm long and the transverse rod is 36cm long; The boom is 201 stainless steel

Customizable stainless steel base; Optional: square desktop, gantry boom.





## PS-1

### Stainless steel pet bath without door

The material is 304 Stainless steel Thickness is 1.2mm with nonslip foot mate use 2 inch anti-block water, and equipped with multi-functional high pressure flushing and adjustable hot and cold water control faucets

High-pressure water leak proof anti-blocking, we can customize the size as your requirements

Size: 1300\*740\*900-1300mm. packing size: 1380\*810\*740=0.83m<sup>3</sup> GW: 99kg



## PS-2

### Stainless steel pet sliding door bath sink

The material is 304 Stainless steel, thickness is 1.2mm, provide skid proof foot gauze pad 7.6cm anti-blocking and leak proof, Provide multi-functional tap with high pressure and can be adjusted hot and cold water

Size: 1300\*740\*900 / 1300mm, packing size: 1380\*810\*740=0.83m<sup>3</sup> GW: 99kg



## PS-4

### Full stainless steel electric lifting pet bath sink

The material is 304 stainless steel thickness is 1.2mm, with electric controller switch to automatic adjustment of table Provide multifunctional tap with high pressure and can be adjusted hot and cold water,thus sink is very suitable for pet clinic

Size: 1300\*740\*1170-1600mm, packing size: 1375\*810\*975-1.09m<sup>3</sup> GW 118kg. And we can customize the size as your requirements

High-pressure water, leak proof, anti-blocking Never rust.



## PS-3

### Stainless steel pet pedal bath sink with hair drier machine and movable door

The material is 304 Stainless steel, thickness is 1.2mm provide skid proof foot gauze pad 7.6cm anti-blocking and leak proof, provide multi-functional tap with high pressure and can be adjusted hot and cold water

Size: 1300\*740\*900 / 1300mm, packing size: 1380\*810\*740=0.83m<sup>3</sup> GW: 105kg



## PS-5

### Stainless steel surfing bath sink

The material: 304 stainless steel; thickness: 1.2mm

Size: LHW: (1.900\*740\*900 / 1300mm; 2.1100\*740\*900 / 1300mm; 3.1300\*740\*900 / 1300mm) Small packaging: 1180\*810\*1055 120KG

With spa function stainless steel bathtub, three sizes are optional. equipped with control knobs operators can control the strength and timing of water flow bubbles. The auxiliary hot air function helps maintain the original water temperature. This bathtub is well sealed and can be used for pet medical baths The bottom adjustment screw can be placed smoothly



## PS-6

### Electric lift plastic bathtub

Plastic tub, plastic sprayed steel frame,there's a non-slip pattern on the bottom of the tub,electric lifting mode,thickness is 5cm, optional colors

Size: 149\*73\*78-128cm, packing size: 135\*72\*70cm, GW80 KG, bearing capacity less than 100kg



## PS-7

### Full stainless steel electric lifting pet bath sink

The whole 304 stainless steel is made durable, no rust, and three sides to prevent water from splashing. full fillet design, easy to clean, filter wool and water to prevent clogging.

Size: 620\*500\*800 / 1100mm



## PS-8

### Inpatient caged wash tank

304 stainless steel material pet cage is designed for tray washing. It can wash the pet cage tray into the sink easily and quickly. It is also equipped with high pressure water gun for easy use.

Size: 620\*500\*800mm



## PS-9

### Stainless steel flume

304 stainless steel material, pet cage is designed for tray washing. It can wash the pet cage tray into the sink easily and quickly. It is also equipped with high pressure water gun for easy use.

Size: 620\*500\*800mm



## PS-10

### Advanced computer edition bathtub with drying box

Hardware + waterfall + water inlet + hand-held shower + anti-jumping ring + computer version control + bubble bath + colorful lamp + ozone (turn off ozone with high power)

Outside diameter: 65\*60\*95cm, inside diameter: 57\*38\*43cm, 0.55m<sup>3</sup> / GW 30KG

Optional color: black and white and pure white



## PS-11

### Advanced computer edition bathtub with drying box

Common faucet + hardware + water column inlet + hand-helds shower + anti-jumping ring + computer version control + bubble bath + surfing massage + colorful lamp + ozone (turn off ozone with high power)

Outside diameter: 75\*65\*100cm, inside diameter: 60\*45\*40 cm, 0.7m<sup>3</sup> / GW 35KG

Optional color: black and white, pure white and yellow



## PS-12

### Advanced computer edition bathtub with drying box

Hardware + waterfall water + hand-held shower + anti-jumping ring + computer version control + bubble bath + surfing massage + colorful lamp + ozone (turn off ozone with high power)

Outside diameter: 90\*68\*95cm, inside diameter: 76\*53\*58cm, 0.8m<sup>3</sup> GW 40KG

Optional color: black, white and yellow



## PS-13

### Advanced computer edition bathtub with drying box

Hardware + waterfall water + hand-held shower + anti-jumping ring + computer version control + bubble bath + surfing massage + colorful lamp + ozone (turn off ozone with high power)

Outer diameter: 120\*73\*95 cm, inner diameter: 98\*62\*58 cm, 1.1m<sup>3</sup> GW 50KG

Optional color: black and white and pure white



## B-1

### Pet Stainless Steel Stretcher

Main material is 304 stainless steel, thick cloth. DIY design, dismantling combination is more convenient

Size: 1200\*550mm



## S-5

### Pet super thin electronic ground weighing machine

4 scale cores design, multi-point sensor digital display, weighing machine standard, super large plane, more convenient for weighing large dogs, the display confirms the weight intelligently and the weight of the pets is more flexible. it is made of high quality 304 stainless steel, weighing range is 0-150 kg, 304 stainless steel

Size: 1200\*600\*65mm, Packing size: 1270\*675\*230=0.2m<sup>3</sup>, GW 48kg





## B-2

### Stainless steel pet operation auxiliary vehicle

The whole 304 stainless steel material is corrosion resistant, acid proof and rusty. It is convenient, easy to use, safe and hygienic, and can be customized.

Equipped with universal brake, the Luntai fence is equipped with drawer for multilevel placement.

Size: L700mm\*W450mm\*H800mm, Packing size 835\*570\*1010=0.48m<sup>3</sup>  
GW: 46kg



## B-3

### Stainless steel pet holder

Using 25\*25 stainless steel 304 square tube as the skeleton, and the laminate is made of 1.0mm 304 stainless steel plate, and the pet is fixed with an active cotton gauze which can protect the pet from damage.

Size: large 800\*500\*800mm, Small: 600\*450\*800mm



## B-4

### Stainless steel lifting operation auxiliary table

304 stainless steel, the lifting function and the rolling universal brake wheel are simple, practical and not rusty, the utility excess for the operating table is used.

Size: 880\*500\*850-1400mm



## B-5

### Stainless steel pet ultrasound table

8 pcs nickle stainless steel, easy to clean, not easy to rust

Special used stainless steel pet ultrasound table for ultrasound machine use, targeted design according to practical needs, more accord with practical case, the edge treatment is round and smooth, size can be customized, and equipped with full-directional brake wheels, convenient to be moved.

Size: 1100\*550\*700mm, Packing size 1170\*620\*860=0.62m<sup>3</sup>  
GW: 45kg



## B-6

### Multi-layer equipment load-bearing cart with socket

The main body is made of 304 stainless steel. The socket is protected against leakage and is safe to use. universal brake or fixed foot at the bottom.

With its own socket, easy to use, large space for equipment, durable, pet hospital essential

Size: L600\*W650\*H1595mm, Packing size: 1655\*725\*760=0.91m<sup>3</sup>, GW: 87kg



## B-7

### Stainless steel multi-layer equipment load-bearing cart

The main body is made of 304 stainless steel. The universal brake wheel or fixed adjustment foot is optional on the bottom

A large space, durable, pet hospital essential

Size: 545\*455\*1150mm



## B-8

### Stainless steel corner pet examination station

304 stainless steel material, flexible collocation and can be customized.

Size: 1100\*520\*770mm / 650\*300\*770mm



## B-9

### Stainless steel acrylic baffle infusion table

Made of all 304 stainless steel, the frame 25\*25 square tube thickness 1.2mm is equipped with active mesh and active contamination plate, the railings can be easily put down, both sides are equipped with active toughened glass.

Large: 1100\*600\*850mm / small: 900\*500\*850mm



## B-10

### Multi function infusion, severe and simple operation cart

All 304 stainless steel is made, the thickness of the table is 1.2mm, the thickness of the 22\*22 square tube of the column is 1.2mm. It is convenient to use the active infusion frame, the movable net piece and the movable rail, and the brake wheel or the adjusting foot can be selected.

Size: 1370\*600\*780mm



## B-11

### Stainless steel active rail infusion table

All 304 stainless steel is made. the thickness of the table is 1.2mm, the thickness of the 22\*22 square tube of the column is 1.2mm. It is equipped with an active infusion frame, and the movable railing is convenient to use, and the brake wheel or the adjusting foot can be selected.

Trumpet: L900\*mm\*W550mm\*H780mm / Large: L1100mm\*W600mm\*H780mm

Reasonable structure can also be used for transporting stations and diagnostic stations.



## B-12

### Stainless steel animal dissection station

All stainless steel 304 material, table concave design, equipped with stainless steel flush pool and double flush cage easy to use, in order to ensure brightness demand, with high brightness lamps, one equipped with active pallets, convenient to put surgical instruments, practical.

Large: L1600mm\*W650mm\*H800mm, Trumpet: L1100mm\*W550 mm\*H800mm



## B-13

### Stainless steel simple auxiliary table

Pet hospital special auxiliary desk is simple, convenient and easy to use.

Size: L650mm\*W430mm\*H800mm





## B-14

### Three layer (increasing by degrees) equipment carrying trolley

The main body is made of 304 stainless steel. the universal brake wheel or fixed adjustment foot is optional at the bottom.

Easy to use ,the device has a large space and is durable.

Size: 550\*550\*1500mm



## PCR-1

### Pet care room (drying device)

Pet Care Room is Cabinet type dry room that dries and air-showers pets. featured with an infrared LED module. Ionizer module, oxygen/aroma therapy and hair collecting function.

Interior size: 105.3x53.3x82.4cm, external size: 118x76.5x106.8, nw 115kg

Power: 200-240V 50/60HZ 100-120v 50/60Hz

Breed: Two small-sized breed less than 30Kg at the same time or one large-sized dog.



## PCR-2

### Pet care room (drying device)

The main body is made of 304 stainless steel. the universal brake wheel or fixed adjustment foot is optional at the bottom.

Pet Care Room is Cabinet type dry room that dries and air-showers pets. featured with an infrared led module. Ionizer module, oxygen/ aroma therapy and hair collecting function.

Power: 200-240V 50/60HZ, 100-120v 50/60Hz

Breed: Two small-sized breed less than 20Kg at the same time or one large-sized dog.



## PCR-3

### Pet care room (drying device)

Pet Care Room is Cabinet type dry room that dries and air-showers pets. Featured with an infrared led module. Ionizer module, oxygen/ aroma therapy and hair collecting function.

Interior size: 45.6x56.3x57.4cm, external size: 58x79.5x81.7cm, nw 63kg

Power: 200-240v 50/60HZ, 100-120V 50/60HZ

Breed: A welsh corgi weighing about 20KG. Beagle, bull fighting dog and other medium-sized dogs.



## PCR-4

### Pet care room (drying device)

Interior size: 47.8x47.8x42.25cm, external size: 50x50x73cm, nw: 30kg

Power: 200-240v 50/60HZ

Suitable breed: One small size dogs or cat less than 5Kg.



## PCR-5

### Pet care room (drying device)

Interior size: 47.8x47.8x42.25cm, external size: 50x50x73cm, nw: 30kg

Interior size: 48.9x41.6, external size: 50.6x67.4, nw: 23kg

## COT-1

### New-generation Cat Oxygen Therapy Equipment

Characteristic: One-button Operation/Integrated Oxygen-generating, and Atomizing Machine/High-performance Molecular Sieve/Stable Oxygen Supply/High Energy Compressor

Product Information: Oxygen concentration: 235% (V/V), Oxygen flow: 2L/min (fixed), Power supply: AC110V/1A ± 10% AC220V/0.75A ± 10%, Net weight: 14.5kg



## COT-1

### New-generation Cat Oxygen Therapy Equipment

Characteristic: One-button Operation/Integrated Oxygen-generating, and Atomizing Machine/High-performance Molecular Sieve/Stable Oxygen Supply/High Energy Compressor

Product Information: Oxygen concentration: 235% (V/V), Oxygen flow: 2L/min (fixed), Power supply: AC110V/1A ± 10% AC220V/0.75A ± 10%, Net weight: 14.5kg



## PI-2

### Pet incubator

Improved humidification system, The new heavy duty ultrasound humidifier ensures an ultra high humidification performance, now the humidity could be increased to 85RH (28°C).

ICU Illumination Function, setting of security mechanism



## PI-4

### Aerobic full functional animal medical monitoring pod

This machine is suitable for body temperature resuscitation, infusion, oxygen delivery, blue light atomization treatment, rescue, hospital observation, etc. of sick, critically ill and sick animals. It can also be used as aseptic and constant temperature culture of young pets.

#### Parameters:

Overall dimension	Length 1160 / depth 600 height 1680mm	Display	8.4 W171XH128mm
Power supply	AC100V/220V 50/60HZ (with ground)	Blackout guarantee	Emergency ventilation hatch with program control
Conditions of use	-10~40°C (indoor)	Touch screen	Pointer film resistance type
Set temperature	15~38°C, temperature control accuracy ± 0.5°C	Microprinter	Intelligent automatic timing printing system
Set oxygen concentration	21~60% control accuracy ± 1%	Blue light medical system	Blue Light 415nm LED
Alert • Warning	O2 Abnormal concentration abnormal temperature, abnormal sensor, abnormal door switch, abnormal CO2 concentration emergency hatch switch	LED lighting panel	There are two ways of light control: ten levels of warm light adjustable strength control, special cold light for medical examination



## PI-1

### Pet incubator

Double decker design, well for two units, specialized top shelf for air conditioner or oxygen generator locating, ICU accessories organizing

Specialized top shelf for air conditioner or oxygen generator locating.

Stable and Sturdy, made from Gauge 17 steel panel, ensures long service life.

Comes standard with casters, for easy moving and sterilization operation.



## PI-3

### Pet incubator

Perfect match for the KaniStar ICU. Gives the ICU the ability to set the desired stable temperature for the patient by producing chilled airflow.

Remotely controlled by the ICU. Amazingly quiet without startling pets.





## MT200-80D

### Veterinary Digital X-ray System

8KW stationary, complete x-ray tube and generator 8KW 125kv 160mA, movable table with column, 1417 Wired Csi Flat panel detector.



## MT50-PHG

### Veterinary Digital X-ray System

Complete x-ray tube and generator 8KW 125kv 160mA

Size: 320\*285\*400mm, nw 18kg



## MT100-20B

### Veterinary Digital X-ray System

32KW stationary 32KW 125kv 400mA, movable table with column, Toshiba X-ray tube E7239X, 1417 Wired Csi Flat panel detector.



## RV-32A

### Veterinary Digital X-ray System

Intelligent adjustment of exposure parameters, real-time; synchronization control with workstation; real-time radiograph display; tough screen optional single screen (Toshiba tube and original Germany board), the single screen is a domestic ball tube.

Tabletop Size: 1400x720mm, ±50mm  
Tube mA Range: 10-400mA  
Imaging Area: 430x430mm

Packing size: 1940\*1010\*975mm  
Focus: 1.0mm/2.0m  
Scanning Matrix: 3072x3072 pixels

SID: 1000mm, ±50mm  
Thermal Capacity: 900KJ  
Pixel Size: 140µm

Output: 32KW  
Scintillator: Csl  
Imaging Time: ≤1S



## MT10 CUPID 20

### Veterinary Digital X-ray System

Toshiba X-ray tube E7239X1.5 Years warranty, 14\*17 Portable flat panel detector 2 years warranty

Color is optional





## BE12 VET

### Infusion Pump

3.5 TFT LCD touch Screen, rate mode, drip mode, micro mode 03, drug library (without), support a wide variety brands of infusion set, infusion accuracy  $\pm 5\%$ . flow rate range 0.1-1200ml/h. bolus rate 300-1200ml/h, KVO rate 1-5ml/h 2000 history records storage. multi visual and audible alarms system, unique heating function.

Packing size: 230\*195\*195mm, nw 1.6kg, gw 2.5kg.

Drug library (optional)



## SEMI-2

### Infusion Pump

IV set: 15d/ml, 20d/ml, 60d/ml, rate: 0.01-2000ml/h, accuracy:  $\pm 2\%$ , large LCD display, couple with dock station FS-3

Optional: work modes and linked workstation, the price is different

Packing size: 40.5\*18\*33.5cm, nw 2kg, gw 3.4kg



## EB08 V

### Syringe Pump

3.5" LCD, rate mode, time mode, weight mode, standby mode, compatible with 5ml/10ml/20ml/30ml/50ml standard syringes as open system, drug library (optional), accuracy  $\pm 2\%$  (After syringe correct calibration), flow rate 0.1-1800ml/h, KVO rate 0.1-1ml/h 08. 2000 history records storage stackable function (1 channel to 10 channels), multi audible and visible alarms system operating for more than 6 hours after full charged at 5ml/h, nurse call system (without) wireless monitoring system (without)

Single channel packing size: 345\*270\*320mm, nw 1.5kg, gw 2kg  
dual channel packing size: 330\*270\*320mm, nw 3kg, gw 5kg



## SEMI-1

### Syringe Pump

Syringe: 2, 5, 20, 30, 50/60ml rate: 0.01-1500ml/h, accuracy:  $\pm 2\%$ , large LCD display, 0 couple with dock station FS-3

Optional: work modes and linked workstation, the price is different

Packing size: 40.5\*18\*33.5cm, gw 2.7kg, gw 3.7kg



## X3

### Veterinary anesthesia ventilator

Operation Screen: 5.4 inch, drive & control mode: pneumatic drive and electronic control ventilation modes: VCV. PCV. SIMV-VC. Manual, standbv. tidal volume: 50-1500 ml, frequency: 1-100 bpm, tinsp: 0.1-10.0S, 1:E: 4:1-1:10, pause: 0-60% Peep: off 3-30, pressure control: 5-70cm H2O, flow trigger: 0.5-20L/min, pressure monitoring: 0-20 cm H2O.

Package size: 68\*37\*36 cm, GW: 13.5 kg



## MT-550

### Veterinary anesthesia ventilator

Waveform: Pressure, Flow-rate, Volume, CO2 (optional), Pleth (optional) Loop: PV loop. PF loop. FV loop. PEEP: Inner Electric PEEP3. Inner Battery: Li-ion, work time more than 3 hours. 8" TFT. with touch screen operating Mode: VCV, PCV, SMIV-VC, SMIV-PC, PSV, Manual/SPONT. Optional: SIM V-PRVCP, RVC



## MT-VA

### Vet anesthesia machine

Gas source: O2 quick inlet port O2 FLUSH: 20L/min--75L/min. flow meter: 02. 0L/min-4L/min. ladjustable easily ,airway pressure gauge: -20cm H2O-100cm H2O.

Three methods: table top and trolley and wall mounting arm, trolley is optional and wall mounting arm is optional.

Packing size: anesthesia machine: 66cm\*34cm\*48cm. gw 19kg. trolley: 65cm\*65cm\*17cm, gw 7kg.



## MT-01B

### Anesthesia machine (high-end model)

LED display ,built-in ventilator, 4-tube flow meters, O2, N2O, vaporizer: enflurane / Isoflurane / sevoflurane (optional: halothane), respiration: AC, IPPV, SIPPV, MANUAL, tidal volume: 50-1500ml / E.Ratio: 1:1.5~1:3.0

Main unit ctn / Li-Ion 830\*770\*1230mm, nw 58kg, gw 68kg, accessory CTN: 660\*620\*350mm, nw 18kg. gw 23kg.



## MT-01

### Anesthesia machine (standard model)

LED Screen: built-in Ventilator. 2-tube flowmeters: O2 & Air vaporizerenflurane / Isoflurane / sevoflurane (optional: halothane), respiration mode: A/C. IPPV. SIPPV. MANUAL

Main unit ctn / Li-Ion 830\*770\*1230mm, nw 65kg. gw 75kg, accessory CTN: 660\*620\*350mm nw 11kg, gw 16kg



## SV1300

### Veterinary anesthesia machine

O2 flow meter: 0-15L/min flush valve: 10-15L/min, vaporizer: TEC3 Isoflurane / sevoflurane breathing bags: 0.5/1/2/3L endotracheal tube: 2.5-8.0mm. oxygen hose: 3m. optional configuration: bain circuit, laryngoscope, regulator, anesthesia mask, Warranty: 3 years

Constructed of medical grade aluminum

Package: carton Package: 30\*50\*60 cm & 70\*70\*20 cm, GW: 24 KG.



## IV-1200

### Veterinary anesthesia machine

O2 flow meter: 0-4L/min ,flush valve: 10-15L/min ,vaporizer: Isoflurane / sevoflurane, breathing bags: 0.5/1/2/3L, endotracheal tube: 2.5-8.0mm, oxygen hose: 3m, optional configuration: bain circuit, laryngoscope, regulator, anesthesia mask, warranty: 3 years

Package: carton Package: 30\*50\*60 cm & 70\*70\*20 cm, GW: 24 KG.



## IV-1200P

### Veterinary anesthesia machine

O2 flow meter: 0-4L/min flush valve; 10-15L/min vaporizer: Isoflurane / sevoflurane, breathing bags: 0.5/1/2/3L, endotracheal tube: 2.5-8.0mm, oxygen hose: 3m, optional configuration: bain circuit, laryngoscope, regulator, anesthesia mask, warranty: 3 years.

Package: carton Package: 30\*50\*60 cm & 70\*70\*20 cm, GW: 24 KG.

Volatile tank with TEC3 selected.



## MT-VET12H

### Animal monitor

Electrical specifications: 110-250V/AC, 50/60Hz, display mode: TFT, applicable rings: cats, dogs, pigs, horses.

High-precision discrete parameter module for animals: ECG, blood oxygen and blood pressure module; 12.1-inch color LCD display, high resolution 800x600 Dpi.

Standard parameters: ECG, blood oxygen, blood pressure, respiration rate, body temperature. 1 heart rate, optional: built-in thermal recorder, touch screen, ETCO<sub>2</sub>, 2-IBP. USA SUNTECH Blood I pressure module, monitor wall bracket, monitor trolley, animal connection accessories: ecg cable, I blood oxygen probe, blood pressure cuff, body temperature probe

12 inch inner box: 36\*20\*40CM G.W: 5.5kg, 12 inch box (2 boxes): 45\*38\*43CM G.W: 11.7kg



## MT-VE15

### Animal monitor

Standard configuration: ecg, heart rate, respiration, blood oxygen, blood pressure, temperature, independent module, touch screen, built-in lithium battery: 2000mAh, LCD display size: 15 inches

Optional: external main or side current ETCO<sub>2</sub>, single or double channel IBP, wall rack, built-in recorder

Package: 420\*380\*285mm, GW 7.3kg



## MT-DE12-VET

### High-end veterinary electrocardiogram

Accurate ECG automatic diagnosis function; 10.2 inch high definition and wide-angle color LCD screen, capacitive touch control, 12-lead display; six ECG record combination modes; eight ECG display combination modes: single line, 3 channels, (3+R) channel, (+I+VS) channel, single line 6 channels, double line 6 channels, single line 12 channels, double line 12 channels; with RS232 communication interface, USB interface and LAN network interface; support languages: CHN, ENG, RUS, FREN, GER, PORTU, SPAN

Package: 40\*35\*20cm, GW 7kg



## MT-VM12C

### Animal monitor

Standard configuration: ecg, heart rate, respiration, blood oxygen, blood pressure, temperature, independent modules, built-in lithium battery: 2000mAh, LCD display size: 12 inches

Optional: external mainstream or side current ETCO<sub>2</sub>, single or dual channel IBP, touch screen, wall rack, built-in recorder

Packing size: 380\*350\*300mm, gw 6kg



## MT-HD12VET

### Top Veterinary Patient Monitor

13.3 inch color LCD, full view display, high resolution 1366X768 dpi: Standard parameters: ECG, SpO<sub>2</sub>, NIBP, RESP, Tem-perature, Heart Rate; 10 levels adjustment for the brightness of screen: Double over-pressure protection from NIBP software and hardware to ensure patient safety: Support central monitoring system access to the HL / protocol: Optional for built-in thermal matrix recorder. three trace waveform: IReserved ETCO<sub>2</sub> interface to support plugand- play CO<sub>2</sub> module

Package: 40\*28\*35cm, 5.8kg



## MT300G-VET

### High-end veterinary electrocardiogram

Display of 3/6/12-lead ECG, print mode, sensitivity, paper speed and filter state, etc. on one screen, convenient for contrastively diagnosing. Multiply printing modes and formats, including manual, auto 4x3, auto 3x4+1, auto 3x4, auto 2x6+1, auto 2x6, auto 3-2+1, auto 3-2, auto 1x12+1, auto 1x12, rhythm 4, rhythm 3, rhythm 2, etc. Waveform length printed can be adjusted, and with timed print function

Multi- language (Chinese, English, Spanish, Turkish, Polish, Italian, French, German, Portuguese, Russian, Ukrainian, Serbian, Vietnamese, Slovenian, Slovak, Bulgarian and Nigerian language) interface and report.

Package: 405\*300\*195mm GW: 3.1kg





## MT-TDL-30B

### Low speed centrifuge

Maximum speed: 4000r/min, maximum capacity: 50ml x 6 pieces, size: 43x33x31cm, nw: 22kg

The main engine cannot work independently, so the horizontal rotor and adapter must be selected



## MT-TGL-12MX

### High speed centrifuge

Maximum speed: 16500r/min, maximum capacity: 5ml x 12 pieces, size: 38x28x30cm, nw: 15kg

The main engine cannot work independently, so the horizontal rotor and adapter must be selected



## MT-TDL-200

### Low speed centrifuge

Maximum speed: 4500r/min, maximum capacity: 10ml x 12 pieces, size: 40x28x23cm, gw 12kg

The main engine cannot work independently, so the horizontal rotor and adapter must be selected



## MT-X707 400

### Mini Centrifuge

The centrifuge has perfect appearance and performance. It has small size, light weight and is widely used. It is running smoothly, easy to operate and use. Motor with ball bearings, German imports brush and commutator. Life of the centrifuge is more than 800 hours. The instrument is mainly applicable to 2ml, 1.5ml, 0.5ml, 0.2ml centrifuge tubes and 0.2mlx8 strips centrifuge tube.

Power: 30w, speed: 4000r/min, size: 19\*19\*12.5cm



## ZY-5AW

### Oxygen Concentrator

Oxygen flow: can be adjusted (1L-5L), capacity: 400VA, oxygen purity: 93%±3% (0.5L-5L), power: 220/110V, 10 inches LED screen

Size: 305X308X680mm, nw 20kg, packing size: 0.13m<sup>3</sup>, gw 23.9kg



## ZY-10zW

### Oxygen Concentrator

oxygen flow: can be adjusted, capacity: 550VA, oxygen purity: 93%±3% (0.5L-10L), power: 220/110V

Size: (1L-10L) 364\*385\*731mm, nw 29kg, packing size: 0.18m<sup>3</sup>, gw 32kg



## 12B-I/18B-I/23B-I

### Tabletop Autoclaves

Based on EN13060 standard, open-type water tank design, easy to clean LCD display all the details of cycle, high density filter, fully automatic high quality vacuum pump build-in steam generator, over temperature and over pressure protect achieved program customization, 20 minutes fast sterilization cycle, optional printer and color with B&D test and Vacuum test, advanced self-test system

Packing size: 65\*52\*52mm, N.W/G.W: 45/49 KG (12L)  
65\*52\*52mm, N.W/G.W: 48/50 KG (18L)  
78\*52\*52mm, N.W/G.W: 50/55 KG (23L)



## 12B-II/18B-II/23B-II

### Tabletop Autoclaves

Based on EN13060 standard, open-type water tank design, easy to clean LED simply display, high density filter, fully automatic high quality vacuum pump, build-in steam generator optional printer over temperature and over pressure protect, 20 minutes fast sterilization cycle color; blue & purple & orange, With B&D test and vacuum test, advanced self-test system

Packing size: 65\*52\*52 mm, N.W/G.W: 45/49 KG (12L)  
65\*52\*52 mm, N.W/G.W: 48/50 KG (18L)  
78\*52\*52 mm, N.W/G.W: 50/55 KG (23L)



## YX-280B (18L/24L/30L)

### Electric Coal and Gas Heating Portable Autoclave

High Quality SUS304 stainless steel material, electric, coal and gas heating, silicone seal dual scale indicate pressure gauge, double safety valve to ensure safe

Chamber size:  $\phi$ P300\*330mm /  $\phi$ P300\*460mm /  $\phi$ P300\*520mm.

Packing size: 40\*40\*42cm / 40\*40\*55cm / 40\*40\*64cm,  
G.W/N.W: 15kg/14kg 17kg/15kg 18kg/16kg

Power: AC220V / 50Hz / 2.0KW



## YX-280D (18L/24L/30L)

### Portable Steam Sterilizer

High quality SUS304 stainless steel material electric heating system silicone seal to ensure no steam exhaust dual scale indicate pressure gauge, high pressure faucet drainage water sterilization time and temperature can be set. over-temperature protection, over-pressure protection water shortage protection

Chamber size:  $\phi$ P300\*330mm /  $\phi$ P300\*460mm /  $\phi$ P300\*520mm.

Packing size: 40\*40\*53cm / 40\*40\*64cm / 40\*40\*70cm,  
G.W/N.W: 18kg/16kg 19kg/17kg 20kg/18kg

Power: AC220V / 50Hz / 2.0KW



## YX-280DIGITAL (18L/24L/30L)

### Portable Steam Sterilizer

High Quality SUS304 stainless steel material, Electric heating system, Silicone seal Dual scale indicate pressure gauge, Double safety valve to ensure safe LED digital display screen, Microcomputer control system, High pressure faucet drainage water Over-temperature protection, Over-pressure protection, Water shortage protection

Chamber size:  $\phi$ P300\*330mm /  $\phi$ P300\*460mm /  $\phi$ P300\*520mm.

Packing size: 40\*40\*53cm / 40\*40\*64cm / 40\*40\*70cm,  
G.W/N.W: 17kg/15kg 18kg/16.5kg 19kg/17kg

Power: AC220V / 50Hz / 2.0KW



## LX-B(35L-150L)

### High Pressure Vertical Steam Sterilizer

High quality SUS304 stainless steel material, dual scale indicate pressure gauge silicone seal to ensure no steam exhaust, light indicate working status temperature, time of sterilization can be set, water shortage auto-protection over pressure auto-discharging, over current protection over temperature protection drying function can be add (best large than 75L).

Chamber size:  $\phi$ P300\*485mm, packing size: 58\*58\*97cm,  
G.W/N.W: 52kg / 37kg AC220V / 50Hz / 2.5KW (35L)

Optional digital display / volume



## GU-P 209

### Dental Machine

With 1pc 3-way syringe; with 2 pcs handpiece tubing (2-hole/4-hole); with saliva ejector; with LED curing light, with ultrasonic scaler (detachable handpiece 5 pcs tips as free); self-contained air compressor (silent, oil free 600W, stainless steel tank, 4L), clean water supply (600ml), drainage system (1000ml), foot control, etc.

Size: 440\*350\*720mm, nw 35kg  
packing size: 540\*450\*940mm, gw 47kg

Light curing and magnetic inspection are extra



## GU-P 211

### Dental Machine

With 1pc 3-way syringe; With 2pcs handpiece tubing (2-hole / 4-hole) With saliva ejector; contained air compressor silent, oil free, 600W, stainless steel tank, 4L), clean water supply (600ml), drainage system (1000ml), foot control, etc

Size: 670\*580\*860mm, nw 65kg  
packing size: 760\*670\*1040mm, gw 87kg

Light curing and magnetic inspection are extra



## GU-P 212

### Dental Machine

With 1pc 3-way syringe; With 2pcs handpiece tubing (2-hole / 4-hole); With saliva ejector; With LED curing light; With ultrasonic scaler (detachable handpiece, 5pcs tips as free); Self-contained air compressor (silent, oil free, 600W, stainless steel tank, 4L), clean water supply (600ml), drainage system (1000ml), foot control, etc.

Size: 670\*580\*860mm, nw 66kg  
packing size: 760\*670\*1040mm, gw 88kg

Light curing and magnetic inspection are extra



## GU-P 301

### Dental Machine

With 1pc 3-way syringe; With 2pcs handpiece tubing (2-hole / 4-hole); With saliva ejector Clean water supply (600ml), drainage system (1000ml), foot control, etc. No compressor

Size: 470\*400\*790mm, nw 12kg  
packing size: 560\*530\*590mm, gw 17kg

Light curing are extra



## GU-P 302

### Dental Machine

With 1pc 3-way syringe; With 2 pcs handpiece tubing (2-hole / 4-hole); With saliva ejector. With LED curing light; With ultrasonic scaler (detachable handpiece, 5pcs tips as free); Clean water supply (600ml), drainage system (1000ml), foot control, etc No compressor

Size: 470\*400\*790mm, nw 13.5kg  
packing size: 560\*530\*590mm, gw 18.5kg

Light curing are extra



## GU-P 302S

### Dental Machine

With 1pc 3-way syringe; with 2 pcs handpiece tubing (2-hole / 4-hole); With high volume suction. With LED curing light, With ultrasonic scaler (detachable handpiece, 5 pcs tips as free); With built-in lift to control height, and instrument holder is rotatable. With storage space for foot control; Clean water supply (600ml), drainage system (1000ml), foot control, etc. No compressor

Size: 500\*600\*800mm, nw 21kg,  
packing size: 640\*540\*720, gw 36kg

Light curing are extra



## MT-820

### Animal Oximeter

Size: 97\*61\*161, gw 270g



## AM1000A

### Animal Hand held Pulse Oximeter (Bluetooth BLE)

Data can record by software and export via bluetooth, email, Skype ect. Lower consumption, original two AA batteries can continuously work for 24 hours. Low voltage reminder shows in screen when there's low battery, may influence the normal working. App can free download from google play and app store. The machine will automatically power off when there's no single generated.

Packing size: 22\*17\*6cm, NW 115G, GW 477G



## AM6100

### Blood Oxygen and Blood Pressure Integrated Machine

Free APP named "Berry Monitor", dual mode bluetooth, built-in battery high-quality TFT screen, can connect PC and smart phone thru bluetooth. multi-parameter: blood pressure, Temperature, pulse rate, SpO2, ECG, resp. with the whole set of accessories: SpO2 sensor, ECG cable, NIBP Cuff, NIBP Tube, temperature probe, power source Line and carrying case, ECG 1 channels, 3 leads.

Packing: 24\*16\*10cm, NW 257g, GW 1088g



## MT-P8VET

### High-end portable veterinary color doppler

15 inch LED display, windows operation platform (Win8), two probe connectors, professional animal measurement software, element: 1286, PW, CW, 4D, THI, PDI trapezoid imaging, automatic pulse tracing, support OB report print

Application: applicable for animals' examination and diagnosis on digestive system, reproductive system, urinary system for animal hospitals and scientific institutions.

Packing size: 76.5\*50.5\*64.5cm, gw 26kg



## MT-T8VET

### High-end trolley veterinary color doppler

21.3 inch LED display + 13.3 inch touchscreen, windows operation platform (Win8) four probe connectors, professional animal measurement software, element: 128, PW, CW, 4D, PDI, THI, trapezoid imaging, automatic pulse tracing, support OB report print, CD driver

Application: for bovine, ovine, equine, canine, feline and other domestic animals, animals for experiments, wildlife, and some aquatic animals. It is applicable for the inspection of various animals' clinical abdomen, thoracic cavity, heart, tendon, small organs, eyes, reproduction system, etc.

Probe types: phased array probe, convex probe, linear array probe, veterinary trans-rectal probe, veterinary micro-convex probe

Packing size: 102\*72\*153cm, gw 130kg



## MT15

### Basic trolley BW veterinary ultrasound scanner

15 inch LCD display, professional animal measurement software, stable operation platform three probe connectors, element: 80, support OB report overview

System Language: Chinese, English, Spanish, French, Portuguese and Russian.

Packing size: 85\*65\*99cm, gw 38.5kg





## MT-S0

### Basic hand held BW veterinary ultrasound scanner (for small animals only)

5.6 inch LED display, built-in rechargeable battery, professional animal measurement software stable operation platform, single probe connector. Element: 80, offer suitcase for package system Language: Chinese, English

Applications: detect pregnancy, estimate fetal quantities, diagnose disease, fetal vitality evaluation, fetal heart beats, sheep, pig, cat and dog pregnancy diagnosis (integration of four common animal gestational age measurement data)

Frequencies of probes: 2.5MHz / 3.0MHz / 3.5MHz / 5.0MHz

Packing size: 52.5\*17\*37cm, gw 4.5kg



## MT-S1

### Higher end hand held BW veterinary ultrasound scanner for big & small animals both

5.6 inch LED display, built-in rechargeable battery, professional animal measurement software stable operation platform, single probe connector 6. Element: 80, offer suitcase for package system. Language: Chinese, English

Probe (Optional): 7.5 MHz high-frequency linear array probe, 6.5 MHz rectal probe 7.5 MHz back fat probe, 5.0 MHz micro convex probe

Packing size: 52.5\*17\*37cm, gw 4.5kg



## MT-MU10

### Basic Laptop BW veterinary ultrasound scanner

12.1 inch LCD display, built-in rechargeable battery, professional animal measurement software stable operation platform, single probe connector, can work with probe extender, Element: 80 support OB report overview, offer suitcase for package, system Language: Chinese, English, Spanish, French, Portuguese and Russian.

Convex 3.5M HZ: 2.0 M Hz, 2.5 M Hz, 3.5 M Hz, 4.0 M Hz, 5.0 MHz; microconvex 6.5 MHz: 5.0M Hz, 5.5M Hz, 6.5M Hz, 7.0M Hz, 7.5M Hz; linear/rectal 7.5 MHz: 5.5 MHz, 6.5 MHz 7.0 MHz: 7.5 MHz, 9.0 MHz, docking station (option)

Packing size: 47\*22\*40 cm, gw 9.5kg



## MT-MU15

### PC platform full digital vet black and white ultrasonic diagnosis system

Pulsed wave doppler (PW), THI technology, super speckle noise, brighten image and improve the image quality, 2 levels harmonic wave, with independent buttons, invisible and adjustable cyclically, connect the hospital system and realize real-time data sending and receiving equipped with Ultra ISO, system recovering USB flash disk, take full backup at urgent moment

Probe (optional): convex probe, linear probe, veterinary back fat probe, microconvex probe, veterinary trans-rectal probe

Packing size: 47\*22\*40 cm, gw 9.5kg



## MT-L3VET

### Basic Laptop Veterinary Color Doppler

15 inch LED display, windows operation platform (Win 7), single probe connector professional animal measurement software, element: 96, offer suitcase for package PW, 4D, support OB report print

System Language: Chinese, English, Spanish, French, Russian, Arabic, Vietnamese, Portuguese, Indonesian, German, Persian and Thai

Packing size: 60\*50\*27 cm, gw 15kg



## MT-DWP60

### High-end portable veterinary color doppler

15 inch LED display, windows operation platform (Win 8), two probe connectors professional animal measurement software, element: 128, PW, CW, 4D, THI, PDI, trapezoid imaging, automatic pulse tracing, support OB report print

Application: applicable for animals examination and diagnosis on digestive system, reproductive system, urinary system for animal hospitals and scientific institutions.

System language: chinese, english

Packing size: 76.5\*50.5\*64.5cm, gw 26kg



## MT-GW605

### Portable HD endoscope camera

Application: be used for arthroscopy, ENT, PTED (percutaneous transforaminal endoscopic discectomy), cystoscopy, percutaneous nephroscope, ventriculoscope, ductoscope, hysteroscopy, proctoscope, sigmoidoscope, urology resectoscope, plastic surgery endoscope, faparscope, ductoscopy, breast implant endoscope, thoracoscopy, fiber nasopharyngoscope, fiber choledochoscopy, fiber bronchoscope, fiber ureteroscope, APP hernia repair, lacrimal passage, minimally invasive varicose veins, etc.

4 in 1, camera 1000 lines+ LED light source + monitor + HD recorder. Intelligent digital full HD effective pixels: 1920(H) 1080(V). medical grade HD monitor, 17 inch. Light source is customized connector, it accepts fiber light guides with active areas ranging from 3 mm to 10 mm diameter.

Packing size: 66\*58\*24cm, 0.092m<sup>3</sup>, gw 15.3kg, nw 11.6kg



## MT-GW612

### HD Portable camera

4 in 1, camera + LED light source + monitor + HD recorder. high brightness 80 watts LED. medical grade HD monitor, 17 inch. With suitcase, easy to carry. suitable for diagnosis and surgery. application: Laparoscopy, gynecology, urology, ENT, orthopedics, etc.

LCD screen: 17, external U flash disk: MAX 64G

Packing size: 66\*58\*24cm, 0.092m<sup>3</sup>, gw 15.3kg, nw 11.6kg



## MT-HD7021

### Portable HD endoscope USB camera

Application: be used for arthroscopy, ENT, PTED (percutaneous transforaminal endoscopic discectomy), cystoscopy, percutaneous nephroscope, ventriculoscope, ductoscope, hysteroscopy, proctoscope, sigmoidoscope, urology resectoscope, plastic surgery endoscope, faparscope, ductoscopy, thoracoscopy, fiber nasopharyngoscope, fiber ureteroscope, APP hernia repair, lacrimal passage, minimally invasive varicose veins, etc.

Standard 1100 lines effective pixels is 1920(H) \* 1080(P) multi output: USB, SDI can connect to medical monitor, laptop and TV, extinction speed is less than 0.1s

Packing size: 41\*29\*16cm, 0.019m<sup>3</sup>, gw 3.5kg, nw 1.45kg



## MT-GW702C

### Portable endoscope USB camera

Application: can be used for arthroscopy, ENT, cystoscopy, hysteroscopy, etc.

Portable usb camera system, for different surgery. It can be connected to laptop, medical monitor and TV. Complete usb camera set including usb camera system, optical coupler, BNC line, AV adapter, power line and suitcase. Very convenient for doctors to visit a patient at home.

Standard 700 lines, effective pixels is 795(H) \* 596(V). extinction speed is less than 0.2s.

Packing size: 40\*29\*12cm, 0.014m<sup>3</sup>, gw 2.1kg, nw 1kg



## MT-GW603

### Portable FHD endoscope camera

Used for arthroscopy, ENT, PTED (percutaneous transforaminal endoscopic discectomy), cystoscopy, percutaneous nephroscope, ventriculoscope, ductoscope, hysteroscopy, proctoscope, sigmoidoscope, urology resectoscope, plastic surgery endoscope, laparoscopy ductoscopy, breast implant endoscope, thoracoscopy, fiber nasopharyngoscope, fiber choledochoscopy, fiber bronchoscope, fiber ureteroscope, APP hernia repair, lacrimal passage, minimally invasive varicose veins, etc.

4 in 1 camera 1000 lines + LED light source + monitor + HD recorder. intelligent digital full HD effective pixels: 1920(H) \* 1080(V), medical grade HD monitor, 21 inch.

Packing size: 78\*57\*22cm, 0.098m<sup>3</sup>, gw 17.3kg, nw 15.7kg



## MT-GW611

### Portable endoscope camera

Can be used for arthroscopy, ENT, PTED (percutaneous transforaminal endoscopic discectomy), cystoscopy, percutaneous nephroscope, ventriculoscope, ductoscope, hysteroscopy, proctoscope, sigmoidoscope, urology resectoscope, plastic surgery endoscope, laparoscopy, ductoscopy, breast implant endoscope, thoracoscopy, fiber nasopharyngoscope, fiber choledochoscopy, fiber bronchoscope, fiber ureteroscope, APP hernia repair, lacrimal passage, minimally invasive varicose veins, etc.

4 in 1, camera 700 lines + LED light source + monitor + HD recorder, medical grade HD monitor, 17 inch.

Packing size: 60\*58\*27cm, 0.094m<sup>3</sup>, gw 13.1kg, nw 11.6





## MT-Y003

### Microscopic Endoscope For Animals

Application: ear canal, nasal examination

Diameter: 5.4mm, magnification times: 1x-500x

Size: 5.4mm\*160mm, packing size: 190mm\*90mm\*40mm, gw 160g, nw 60g



## MT-Y008

### Microscopic Endoscope For Animals

Application: pet ear mite endoscopy, oral cavity and nasal cavity endoscopy, skin hair examination

Diameter: 5mm, pixel: 1280\*720

Size: 123\*22\*22mm, packing size: 35\*104\*185, gw 0.25kg, nw0.065kg



## MT-ZX80

### Microscopic Endoscope For Animals

Double mechanical platform, platform size: 132mm\*142mm, halogen lamp 6V/20W AC85-230V

Packing Size: 36.5\*25.3\*46.8cm

Different configurations, different prices



## MT-ZX201

### Microscopic Endoscope For Animals

Double mechanical platform, platform size: 140mm\*182mm, stroke: 50\*75mm, the LED 3w AC85-230v

Different configurations, different prices



## MT-VET3112

### Nasopharyngoscope / Bronchoscope / Cystoscope

Diameter of distal-end:  $\phi$ 5.0mm/ $\phi$ 3.1mm/ $\phi$ 2.8mm, biopsy channel:  $\phi$ 2.0mm / $\phi$ 1.2mm working length: 380mm/410mm/530mm/600mm, view of field: 120°, Depth of view: 3-50mm

Tip deflection: UP 160°; Down 30° / UP 270°; Down 80°

Packing: 64\*48\*18cm ,gw 12.5kg. Remark: We can provide OEM service, technical detail-scan be customized



## MT-VET3113

### Animal Laryngoscope

Packing: 41\*31\*10cm, gw: 3KG



## IN-1

### Single Pressurized Inseminator For Dogs

Medical grade silica gel, canine imitation natural mating design, safe to use, high temperature resistance, application: dog

Packing size: 18\*21.5\*6 cm, gw 0.8kg  
Small (3-20 kg), medium size (20-40kg), medium large (40-80kg), large size (over 80kg for dogs)



## IN-3

### Dog Double Pressurized Inseminator

Medical grade silica gel, canine imitation natural mating design, safe to use, high temperature resistance, application: dog, pig

Packing size: 30\*23\*11 cm, gw 1.2kg  
Small (3-20 kg), medium size (20-40kg), medium large (40-80kg), large size (over 80kg for dogs)



## IN-2

### Single Pressurized Inseminator For Dogs (With The Handle)

Medical grade silica gel, canine imitation natural mating design, safe to use, high temperature resistance, application: dog

Packing size: 30\*23\*11cm, gw 1.2kg

Small (3-20 kg), medium size (20-40kg), medium large (40-80kg), large size (over 80kg for dogs)



## IN-4

### Rotating Screen Visual Sperm Feeding Gun

The display can rotate, length 450mm, pole 350mm, 304 stainless steel (pole)  
61\*19.5\*33CM, 3.5KG / 8\*7\*75CM, 0.5KG



## MT-PRO-ESU100

### High-frequency Electro surgical Unit

Excellent monopolar Cautery machine with smart & light design. Max 4 working modes: Pure Cut / Blend Cut / Standard Coag / Spray Coag. Return electrode monitoring system to avoid any burnt and damage for patient. Clear working modes indication and easy power control. 5 seconds Auto Inspection after turn on, ensure that the machine works fine. Minimal sticking & carbonization, reduce the surgery damage. Different & adjustable operation sounds in case of misoperation. OEM projects welcome.

Power Supply: 110V, 50/60Hz or 220V, 50/60Hz

Size: 330(L) x 280(W) x 100(H) mm, Package: 440(L) x 390(W) x 260 (H) mm, NW: 4.7KG, GW: 8.9KG



## MT-PRO-ESU300

### High-frequency Electro surgical Unit

3-zone LED display for clear operating selection; Advanced & accurate power output control technology, Multi-function ESU with max 7 working modes; Dual power output methods by hand switch or foot switch; Minimal sticking & carbonization, reduce the surgery damage; Auto detection of impedance to protect the patient (REM function); Different & adjustable operation sounds in case of misoperation; Support underwater cutting (TURP etc). OEM projects welcome

Power Supply: 110V, 50/60Hz or 220V, 50/60Hz

(Size: 421(L) x 357(W) x 162(H) mm, Package: 520(L) x 445(W) x 305 (H)mm, NW: 8.7KG, GW: 14.5KG



## MT-830

### Veterinary Hematology Analyzer

Automatic three classification blood cell analyzer ,detection objects: pigs, cats, dogs, rats, mice, sheep, cattle, horses, chickens and monkeys

Measurement principle: RBC and WBC dual channel cell technology, electrical impedance method, HGB colorimetry, the machine can be adjusted to English

Size: 330x420x400mm, Packing size: 530mm\*490mm\*600mm, gw 16kg.



## MT-6000K

### Veterinary Hematology Analyzer

Working principle: fluoresoenoe method, clinical function: three categories 16 or 18 items, three histograms, specimen dosage: 20-40 micro liters of peripheral blood, detection speed: >60 samples/hour, result storage: 1000 copies report printing: built-in 57mm thermal printer or external printer (optional)

Packing size: 605\*550\*510mm, gw 9.8kg



## MT-300

### Urine Analyzer

14 test contents, 7-inch large screen display, touch operation, 514 persons / hour, built in high-speed thermal printer, work environment: 15-35°C, humidity< 85%, power: 20VA



## MT-200

### Urine Analyzer

11 or 14 test items, 60-120 persons / hour, thermal printing / LCD display, detection wavelength: 525nm-660nm, working environment: 15°C-35°C, humidity s 85%, power: 50VA

LCD: 240\*64 dot matrix, 37mm\*130mm, size: 3500mm\*285mm\*140mm



## MT-XR210

### Automatic Biochemical Analyzer

Operation language: chinese and english, 100-240V, 50Hz/60Hz. power: 550VA

Light source tungsten halogen lamp, 12V, service life >2000 hours, can automatically detect the light intensity wavelength: 340nm - 630nm, with 6 standard wavelengths, which can be expanded and optional.

Size: 566mm x 559mm x 601mm, nw 70kg



## MT-XR210

### Convective Patient Warming System

Six-grades of temperature output with high-accuracy optional temperature setting .Pre-heating time only takes 15-20s (temperature set on 46°C for rapidly heated, then lower to 43°C automatically after 10 minutes)

Machine with hanger to be fixed on the cart stand nfusion support and hospital bed fence.

Temperature output Ambient, 34°C, 37°C, 40°C, 43°C, 46°C ( ±2°C)  
Dimensions 29cm X 22cm X 40cm Weight 6.75KG



## OP1S

### Ophthalmoscope

Simple handle, 5 different apertures  
19 kinds of adjustable corrective lenses, Range of lenses: -20d~+20d  
4000k color temperature LED bulb and XHL Xenon Halogen bulb to optional  
The clip with integrated on/off switch  
Box size (mm): 193x102x32, Carton size (mm) 400x215x195  
Pcs/Ctn: 20, Kgs/Ctn: 4.0/3.6



## OT1G

### Otoscope

Direct illumination, 3X magnification for the viewing window  
2.4mm/3mm/4mm/5mm ear tips of two groups  
3200k and 6000k color temperature LED bulb and XHL Xenon Halogen bulb to optional  
Standard handle, handy and convenient  
The clip with integrated on/off switch  
Box size (mm) 190x110x40, Carton size (mm) 400x240x230  
Pcs/Ctn: 20 Kgs/Ctn: 6.8/6.3



## OTP1B

### Ophthalmoscope and otoscope set

A fiber optic otoscope (OT10)  
A direct ophthalmoscope (OP10)  
2.4mm/3mm/4mm/5mm tips tow groups  
Soft nylon bag



## NPM500

### Multifunctional drill saw system (Hollow drill assembly)

Clamping range: 0.8-8mm  
Rotational speed / swing frequency: 0-650rpm



## NPM600


### Multifunctional drill saw system

Canulated drill attachment: Clamping range 0.8-8mm  
Rotational speed / swing frequency 0-650rpm (Hollow drill assembly)

Bone drill attachment: Clamping range 0.8-8mm  
Rotational speed / swing frequency 0-950 rpm

Bone drill attachment: Clamping range 0.8-8mm  
Rotational speed / swing frequency 0-950 rpm



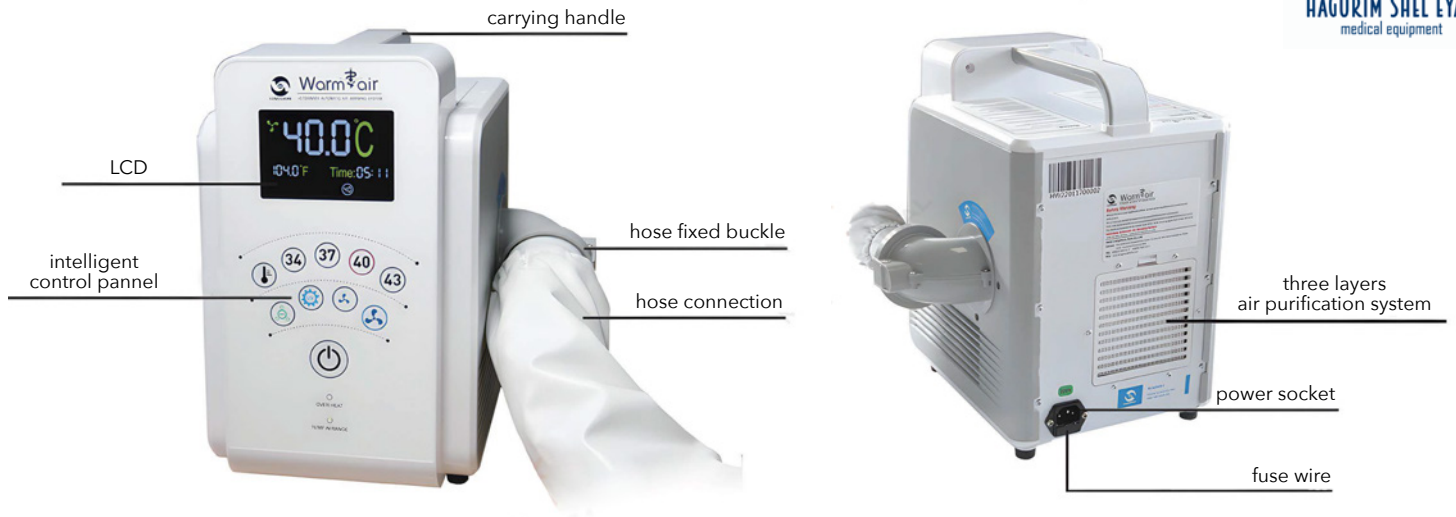

**Hospital cage adaptor**



Sponge Accessories

Fastener Accessories

# MS200

## Veterinary Automatic Air Warming System

**Product Introduction**

Consists of a five-range temperature management module, an internal cleaning and disinfection module, a hot air purification module.

Veterinary Automatic Air Warming System for Veterinary Automatic Air Warming System is mainly used to prevent and treat hypothermia. In addition, if the environment conditions may cause drop in the body temperature of the sick pet, Veterinary Automatic Air Warming System can be used to provide a comfortable temperature for the sick pet. Veterinary Automatic Air Warming System is suitable for both adult pets and young pets.

**Warming Air Cushion**

The air cushion which adopts honeycomb mesh double layer structure is soft and durable and fits the body, and can facilitate uniform air laminar flow and rapid temperature transmission.

The product can provide accurate temperature control during a long surgery of the sick pet to maintain a constant body temperature of the pet.

The warming air cushion will provide a dry and warm environment for the sick pet during its treatment by infusion and hospitalization to reduce and alleviate cold and wet stimulation of the skin caused by limited activity and significantly reduce the probability of occurrence of eczema, bed sores (pressure ulcers), which will greatly help its rehabilitation.

**Specifications**

Temperature control system: Temperature: 5°C-28°C, Humidity: Maximum relative, Minimum relative humidity 35%, Altitude: Maximum 3200 m, Temperature control accuracy: ±0.1°C

Overheat alarm: If the temperature is too high and more than 44.9°C, the yellow overheat indicator light will be on and the alarm sound.


Filtering system: Three-layer air purification and filtering, Efficient 0.2umHEPA air filter screen, 254nm UV efficient sterilization lamp, In the case of negative ion DC 5V, ≥ 1.1x10<sup>4</sup>PCS/cm<sup>3</sup> ±10%


Filtering system: Three-layer air purification and filtering, Efficient 0.2umHEPA air filter screen, 254nm UV efficient sterilization lamp, In the case of negative ion DC 5V, ≥ 1.1x10<sup>4</sup>PCS/cm<sup>3</sup> ±10%

**Parameters**

Heating PTC	700W resistance	Leakage current	Meet the requirements of IEC60601 standard
Fan speed	110V/3540RPM 220V/945RPM	Fan Air volume	>0.05/3345 CMM/RPM
Fan power	45W	Fan noise	49dBA (high speed) 43dBA (low speed)
Fan Static pressure	110V/26mmAq 220V/18mmAq	Equipment grade	110-120VAC/50/60Hz/11A 220-240VAC/50/60Hz/7.2A
Fuse	10A	Ampere rating	12A (110-120VAC) 8A (220-240VAC)
Operating speed	F (fast)	Breaking capacity	15A,12A:10000A (125VAC) 8A:200A (250VAC)
Package size	47cm(L) x 36.2cm(W) x 46cm(H)	Gross weight	9.6kg
Dimensions	30cm(L) x 22cm(W) x 35cm(H)	Net weight	5.5kg
Hose material	Food grade, PU	Hose length	1.4m

**Control Panel**

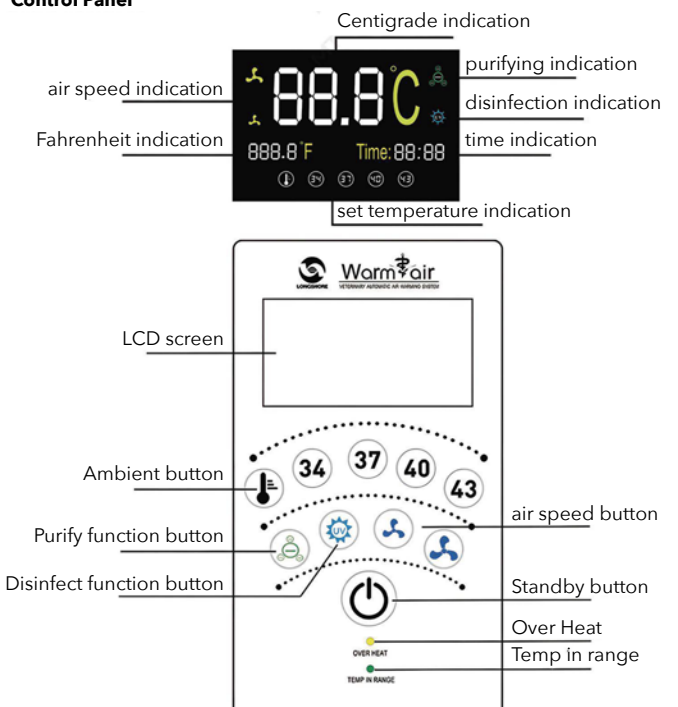

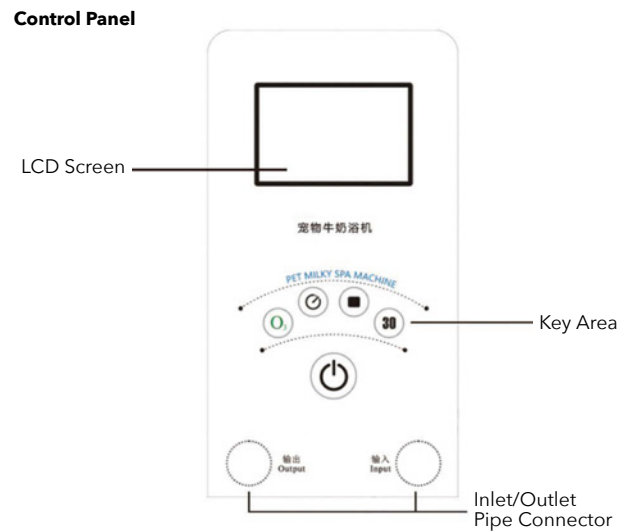

# MS150

## Pet Milky SPA Machine

### Product Overview

MS150 Pet Milky SPA Machine is a advanced equipment that by means of high-tech technology, let the ordinary water transform into a milky white water with nano bubble high oxygen. nano bubble milky SPA machine working principle is using molecular collisions principle, resulting in a large number of nano scale and negative ions, accelerating oxygen dissolution, reducing the composition of chlorine in water. Negative ion, high oxygen nano microbubbles can quickly penetrate into deep skin high, remove dirt, bacteria and other systemic, deep cleansing.

### Main Features

**Oxygen ion sterilization:** Pet Milky SPA Machine built-in oxygen ion (O<sub>3</sub>) generating system, oxygen ion has strong oxidation reduction, is broad spectrum, efficient, fast, safe, no two pollution sterilization gas


**Negative ions enhance immunity:** Machine is working, it can produce a large number of negative ions on the water surface, negative ions, also known as the air in the vitamin, which is the best nature of human health care products.

Deep cleansing and removing grease

Strong chlorine removal

### Technical Parameter

Supply Voltage: AC100-240V~50/60Hz  
 Rated Power: 150W  
 Effluent Rate: 5.0LPM  
 Water Pressure: 0.25MPa~0.60MPa  
 Liquid Temperature: 0°C-60°C  
 Gross Weight: 12Kg  
 Package Size: 46cm(L) X 36cm(W) X 41.5cm(H)

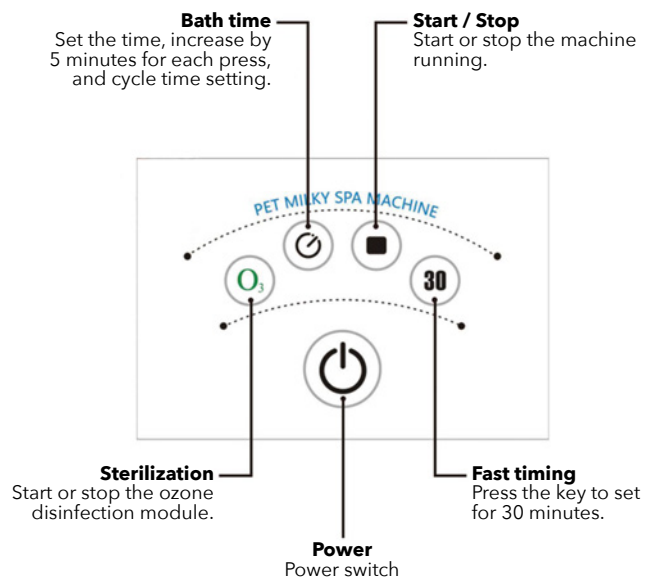





## PB-4

### Pet blower

Wind speed: 38m/s-48m/s, temperature: 40-65, noise: 40db, voltage: 220V (can do 110v), power: 2500w

Size: 115\*360cm. packing size: 32\*19\*19cm, NW 2kg / GW 2.5kg



## PB-5

### Pet blower

Wind speed: 38m/s-48m/s, voltage: 220V (can do 110v). power: 2800W

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, inside the box size: 47\*23\*23cm, NW 5.5kg / GW 6kg

Color: yellow, blue, black



## PB-6

### Pet blower

Wind speed: 38m/s-48m/s, voltage: 220V (can do 110v), power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, inside the box size: 47\*23\*23cm, NW 5.5kg / GW 6kg



## PB-7

### Pet blower

Wind speed: 38m/s-48m/s, voltage: 220V (can do 110v), power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 47\*23\*23cm NW: 5.5kg / GW: 6kg



## PB-8

### Pet blower

Wind speed: 48m/s-60m/s, temperature: 40-65°C, noise: 60db, voltage: 220V (can do 110 v) power: 3000w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 47\*23\*23cm, NW: 5.5kg / GW: 6kg



## PB-9

### Pet blower

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size: 360\*370mm. packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm

## PB-10

### Pet blower

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm, NW: 5.5kg / GW: 6kg



## PB-11

### Pet LCD screen blower

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

NW: 5.5kg / GW: 6kg



## PB-12

### Pet blower

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm, NW: 5.5kg / GW: 6kg



## PB-16

### Pet blower

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm, NW: 5.5kg / GW: 6kg



## PB-15

### Pet arm type hair-pulling machine

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm NW: 5.5kg / GW: 6kg



## PB-18

### Pet blower

Wind speed: 40m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v). Power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 52\*11\*72cm (holder) / 47\*47\*47 cm, a case of 4 units. NW: 5.5kg / GW: 6kg (rack), NW 5.65kg / GW 6.65kg (holder)



## PB-17

### Pet LED arm type hair-pulling machine

Wind speed: 38m/s-60m/s, temperature: 40-60°C, noise: 60db, voltage: 220V (can do 110v) power: 2800w

Size:  $\phi$ 160\*370mm, packing size: 47\*47\*47cm, a case of 4 units, inside the box size: 45\*23\*23cm NW: 5.5kg / GW: 6kg

